LPG LIQUID HOSE WITH CHECK VALVE

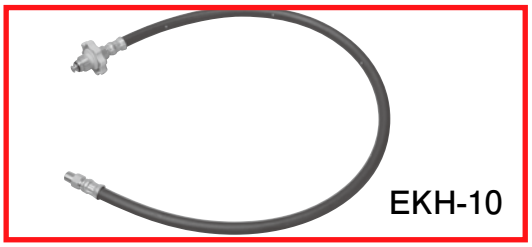

MODEL No.	EKH-C	EKH-10
LENGTH	ABOUT 1,000 mm	
INLET CONNECTION	CHINA POL (M22×1.5, LEFT)	CGA510 POL
OUTLET CONNECTION	R¼ᴮ	
RESISTING PRESSURE	4.0 MPa	
AIR TIGHTNESS	1.8 MPa	

COMBUSTION EQUIPMENT HOSE AND RELATED PARTS

COMBUSTION EQUIPMENT HOSE (φ10 AND φ14)

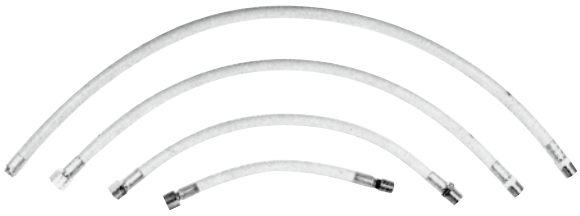

φ10

MODEL No. / SPECIFICATIONS	FH10-SS-2	FH10-SS-3	FH10-SS-4	FH10-SS-5	FH10-SS-6	FH10-SS-7	FH10-SS-8	FH10-SS-9	FH10-SS-10
LENGTH	200 mm	300 mm	400 mm	500 mm	600 mm	700 mm	800 mm	900 mm	1,000 mm
INLET CONNECTION	R½ᴮ (MALE SCREWED ADJUSTABLE)								
OUTLET CONNECTION	TU (FEMALE SCREWED)								
INNER DIAMETER	10.0±0.5 mm								
OUTER DIAMETER	17.5±0.5 mm								
MEASURE OF MAX. CONSUMPTION	2.6 kg/h	2.6 kg/h	2.4 kg/h	2.4 kg/h	2.2 kg/h	2.2 kg/h	2.0 kg/h	2.0 kg/h	1.9 kg/h
	36.4 kW	36.4 kW	33.6 kW	33.6 kW	30.8 kW	30.8 kW	28.0 kW	28.0 kW	26.6 kW
STANDARD No. OF UNIT	30 pcs.								

Note: 5 m or less length hose is available as custom-made.

φ14

MODEL No. / SPECIFICATIONS	FH14-SS-2	FH14-SS-3	FH14-SS-4	FH14-SS-5	FH14-SS-6	FH14-SS-7	FH14-SS-8	FH14-SS-9	FH14-SS-10
LENGTH	200 mm	300 mm	400 mm	500 mm	600 mm	700 mm	800 mm	900 mm	1,000 mm
INLET CONNECTION	R½ᴮ (MALE SCREWED ADJUSTABLE)								
OUTLET CONNECTION	TU (FEMALE SCREWED)								
INNER DIAMETER	14.5±0.5 mm								
OUTER DIAMETER	22.5±0.7 mm								
MEASURE OF MAX. CONSUMPTION	4.2 kg/h	4.2 kg/h	4.1 kg/h	4.1 kg/h	3.9 kg/h	3.9 kg/h	3.8 kg/h	3.8 kg/h	3.7 kg/h
	58.8 kW	58.8 kW	57.4 kW	57.4 kW	54.6 kW	54.6 kW	53.2 kW	53.2 kW	51.8 kW
STANDARD No. OF UNIT	30 pcs.								

Note: 3 m or less length hose is available as custom-made.

JOINT FITTING (FOR φ10 AND φ14 COMBUSTION EQUIPMENT HOSE CONNECTIONS)

MODEL No. / SPECIFICATIONS	TU-L	TU½ FEMALE FITTING	TU¾ FEMALE FITTING	TU½ MALE FITTING	TU¾ MALE FITTING
CONNECTIONS	TU (FEMALE SCREWED) x TU (MALE SCREWED)	Rc½ᴮ (FEMALE SCREWED) x TU (MALE SCREWED)	Rc¾ᴮ (FEMALE SCREWED) x TU (MALE SCREWED)	R½ᴮ (MALE SCREWED) x TU (MALE SCREWED)	R¾ᴮ (MALE SCREWED) x TU (MALE SCREWED)
APPEARANCE					
STANDARD No. OF UNIT	100 pcs.				

PACKING FOR REPLACEMENT (FOR φ10 AND φ14 COMBUSTION EQUIPMENT HOSE)

MODEL No. / SPECIFICATIONS	PARTS FOR COMBUSTION EQUIPMENT HOSE: 2 mm PACKING FOR FH
MODEL No.	FH PACKING TU-P
STANDARD No. OF UNIT	500 pcs.

Note: Use sealing agent to connect φ20 and φ25.