





HYRM-35A

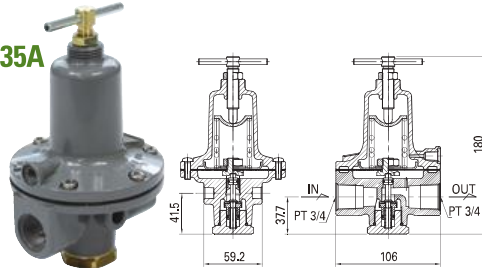


Inlet Pressure Range :	Max 1.56 MPa
Outlet Setting Pressure (P2) :	0.16 ~ 0.24 MPa
Outlet Pressure Range :	0 ~ 0.2 MPa
Capacity :	Max 150 kg/h
Working Temperature :	-20 °C ~ 60 °C
Connection Size :	PT 3/4

Capacity Rate Information

Service	P1 (MPa)	P2 (MPa)	Capacity
LPG	0.25~1.56	0.1	80 kg/h
	0.3~1.56	0.15	100 kg/h
	0.4~1.56	0.2	150 kg/h






HYRM-60A

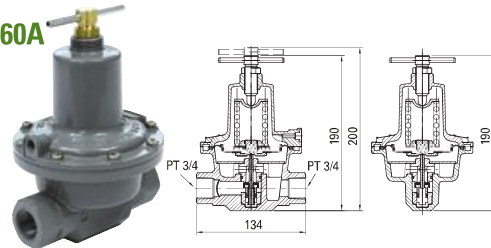


Inlet Pressure Range :	Max 1.56 MPa
Outlet Setting Pressure (P2) :	0.16 ~ 0.24 MPa
Outlet Pressure Range :	0 ~ 0.2 MPa
Capacity :	Max 220 kg/h
Working Temperature :	-20 °C ~ 60 °C
Connection Size :	PT 3/4

Capacity Rate Information

Service	P1 (MPa)	P2 (MPa)	Capacity
LPG	0.25~1.56	0.1	150 kg/h
	0.35~1.56	0.15	200 kg/h
	0.4~1.56	0.2	220 kg/h



HYRM-350A

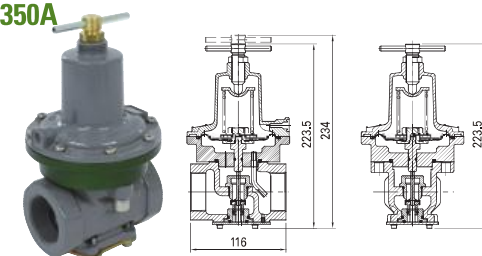

Inlet Pressure Range :	Max 1.56 MPa
Outlet Setting Pressure (P2) :	0.08 ~ 0.24 MPa
Outlet Pressure Range :	0 ~ 0.2 MPa
Capacity :	Max 350 kg/h
Working Temperature :	-20 °C ~ 60 °C
Connection Size :	PT 1-1/4"

Capacity Rate Information

Service	P1 (MPa)	P2 (MPa)	Capacity
LPG	0.25~1.56	0.1	150 kg/h
	0.3~1.56	0.15	220 kg/h
	0.4~1.56	0.2	350 kg/h

